
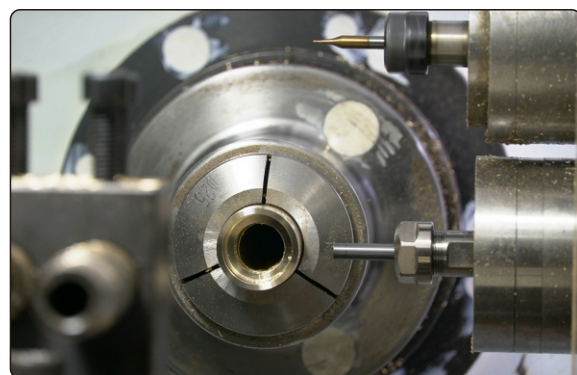



KM-25A Small CNC Lathe

-Turning-Milling process

- ▶ The machine can make small part with cost effective.
- ▶ It add power head for milling and drilling on Y axis.
- ▶ Flat bed with gang type tool post, servo spindle positioning processing.
- ▶ It can be Dia. 2-25mm part machining.

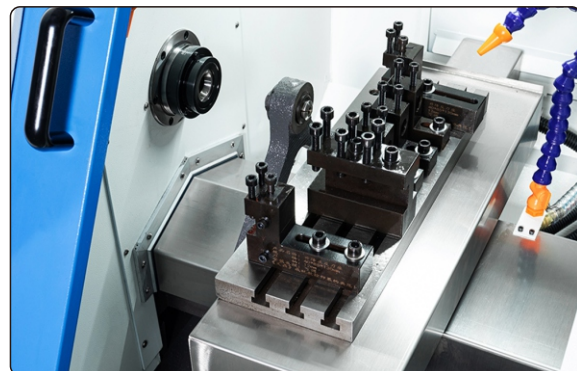

SAMPLE MACHINING

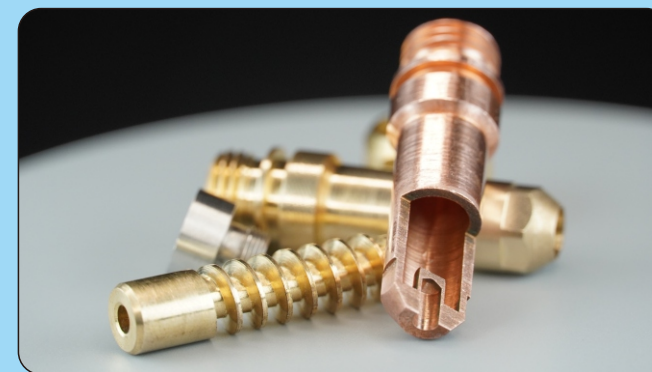

TECHNICAL SPECIFICATION :

Modle	KM-25A
Control system	SYNTEC 6TA
Machining diameter	2-25mm
Max. machining length	150mm
Spindle speed	50-5000r/min
X/Z axis travel	500/180mm
X/Z axis feed rate	18/22mm/min
Tool post	8pcs
Air pressure	0.4-0.6Mpa
Main motor	2.2-3.0kw
Machine size L*W*H	1300×1000×1500mm
Machine weight	1200 kg

Standard configuration

Servo spindle motor

Air pressure collet

8 pcs tool post

Cooling pump

Automatic lubrication

Chip car

Optional

Bar feeder

Fly cutter head

Power head (30000rpm,800W)

30# spindle bore

Hydraulic chuck