



KM-25A Small CNC Lathe

-Turning-Milling process

- ▶ The machine can make small part with cost effective.
- ▶ It add power head for milling and drilling on Y axis.
- ▶ Flat bed with gang type tool post, servo spindle positioning processing.
- ▶ It can be Dia. 2-25mm part machining.

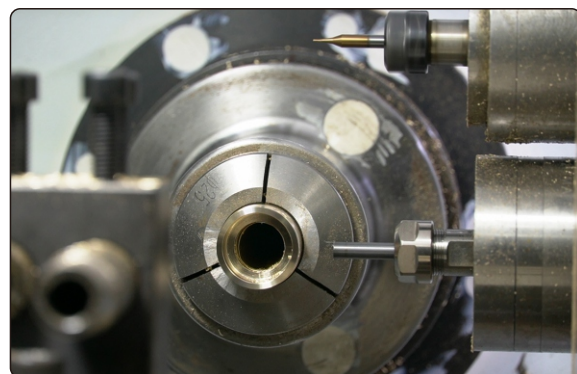

SAMPLE MACHINING

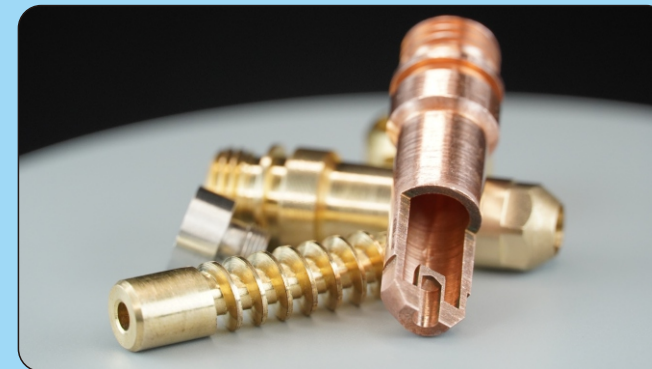

TECHNICAL SPECIFICATION :

Modle	KM-25A
Machining diameter	2-25mm
Max. machining length	150mm
Spindle speed	50-5000r/min
X/Z axis travel	500/180mm
X/Z axis feed rate	18/22 M/min
Tool post	8pcs
Air pressure	0.4-0.6Mpa
Main motor	2.2-3.0kw
Machine size L×W×H	1300×1000×1500mm
Machine weight	1200 kg

Standard configuration

- SYNTEC 6TA Control system
- Yaskawa X/Z axis servo motor
- ALPHA spindle servo motor
- Air pressure collet
- 8 pcs tool post
- Cooling pump
- Automatic lubrication
- Chip car

Optional

- SYNTEC 22TB control system
- Fly cutter head
- Power head (30000rpm,800W)
- Bar feeder
- Hydraulic chuck